




CLD50 SERIES

50 WATT DUAL OUTPUT LED POWER SUPPLY



Features

- * Universal AC Input Range 90~264Vac
- * High Active PFC>0.9
- * Low Inrush Current <5A
- * Low Profile for Easy Installation
- * Low Flicker for Lighting, with Low Ripple&Noise
- * Output Constant Current Design
- * Continuous Short Circuit Protection
- * Suitable for LED Lighting and Moving Sign Applications
- * Safety UL8750, IEC/EN61347-1
IEC/EN61347-2-13 and PSE Mark



MODEL	INPUT VOLTAGE RANGE	OUTPUT OPERATINGVOLTAGE		OUTPUT RATED CURRENT	OUTPUT RATED POWER	OUTPUT VOLTAGE (Max.)	RIPPLE & NOISE (Max.) NOTE2	%EFF. (Typ.) NOTE3
CLD50D240 -C100	90-264 Vac	V1	8-24 VDC	1000 mA	24 W	30 VDC	300 mVpp	85%
		V2	8-24 VDC	1000 mA	24 W	30 VDC	300 mVpp	
CLD50D420 -C060	90-264 Vac	V1	18-42 VDC	600 mA	25.2 W	48 VDC	300 mVpp	86%
		V2	18-42 VDC	600 mA	25.2 W	48 VDC	300 mVpp	

Note:

1. Nominal Input Voltage: 100Vac, 230Vac
2. Ripple and Noise are measured at rated current, 100Vac, Vo=36Vdc(CLD50D420), 21V(CLD50D240) and 20MHz bandwidth with a 0.1uF ceramic capacitor.
3. Measured at rated current, 100Vac, Vo=36Vdc(CLD50D420), 21Vdc(CLD50D240)

Specifications

All specifications are Typical at nominal line , full load and 25°C unless otherwise noted

INPUT SPECIFICATIONS:

AC Input Voltage	90~264Vac
Frequency	50 to 60Hz
Power Factor	100Vac/220Vac PF \geq 0.9 at 85%~100% Load
Inrush Current230Vac Cold start 20A max.
	After 400us <5A
Leakage Current	3.5mA max.

OUTPUT SPECIFICATIONS:

Maximum Output Voltage	(note1) See Table.
Constant Current Accuracy	$\pm 5\%$ max.
Current Line Regulation	(note2) $\pm 5\%$ max.
Current Load Regulation	(note3) $\pm 5\%$ max.
Over Voltage Protection	Voltage Clamp by TVS
Short Circuit Protection	Constant Current with Auto Recovery
Start up time	100Vac 1.6 second max.


GENERAL SPECIFICATIONS:

Efficiency	See Table
Temperature Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ (0~50°C)
Isolation voltage Input to output	3.75KVac
Input to Ground	1.5KVac
Isolation resistance Input to output	$10^8\Omega$ min.
Operating Ambient Temperature	-40 ~ 70°C
Cooling	Natural Convection
Storage Temperature	-40 ~ 85°C
Operating Humidity	10%~80%RH Non-Condensing
Operating Altitude	Sea Level to 3000m
Vibration	10~500Hz, 2G 60min./1cycle, period for 3hours, 3 axes
Shock	30g peak, half sine, 6 axes
MTBF, MIL-HDBK-217F (25°C)	200Khrs typ.

Mechanical Specification


All Dimensions In mm

Tolerance Millimeters:x.x= ± 0.5 ,x.xx= ± 0.25

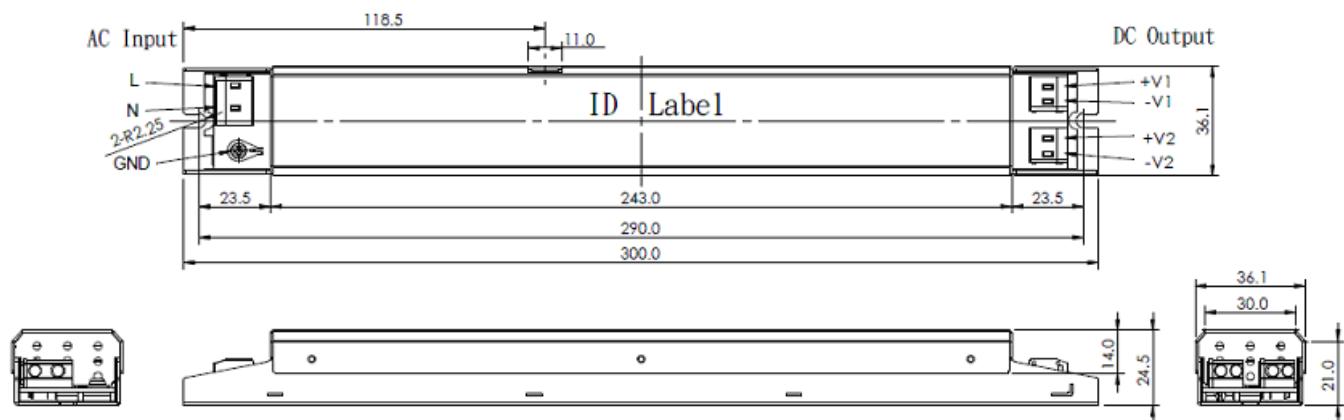

Input Connector: WAGO 235-502 2Pin or Equivalent
Output Connector: WAGO 235-402 2Pin or Equivalent

CLD50 Derating Curve

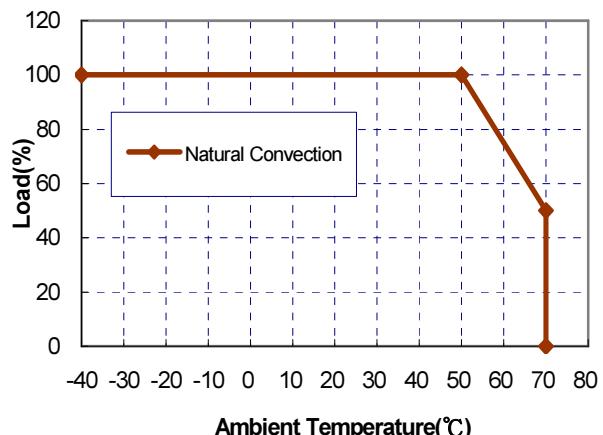

SAFETY AND EMISSIONS:

Safety	UL8750, IEC/EN61347-1 IEC/EN61347-2-13
EMI	EN55022/EN55015 Class B
EMS	EN61547,EN61000-4-2,3,4,5,6,8,11 EN61000-3-2 Harmonic Class C,EN61000-3-3
Dimensions	300x36.1x24.5 mm
Weight	230g
Case Material	Aluminum

NOTE:

1. Output voltage is measured at no load.
2. Current line regulation is measured from high line to low line.
3. Current load regulation is measured from high to low operating voltage.